# **ARISE Single + Double Pedestal**

### 1-1/8" Particleboard Core with Flat Edge (F)

**ATPA1:** 24"d x 36"w TOP is constructed of a 1-1/8" thickness 45# particleboard core with high-pressure laminate (HPL) top surface and phenolic backer sheet for balanced construction. 1-1/8" flat edge is secured to the bottom throughout the perimeter of the top to prevent the edge from pulling away. All tops have a 2.0" corner radius.

**ATPA2:** Two TOP sizes available (30"  $\times$  48" and 30"  $\times$  54"), constructed of a 1-1/8" thickness 45# particleboard core with high-pressure laminate (HPL) top surface and phenolic backer sheet for balanced construction. 1-1/8" flat edge is secured to the bottom throughout the perimeter of the top to prevent the edge from pulling away. All tops have a 2.0" corner radius.

### Leg & Base Assembly

U-shaped base is fully welded and comprised of 13-gauge 3.0"  $\times$  1.5" steel tubes with gray plastic end caps and standard with four (4) 50mm hard wheel locking casters. Podium has one (ATPA1) or two (ATPA2) vertical two piece pneumatic telescoping support column (70mm  $\times$  70mm  $\times$  2mm thick external column and 56mm  $\times$  56mm  $\times$  2mm thick internal column) with plastic bushings for smooth operation. Each column is standard with a single-handed cable activated 150N pneumatic cylinder that provides a smooth and efficient height adjustment range of 19.5". Top height may be adjusted between 29" to 48.5"high. Columns are attached to the base with four M8  $\times$  60mm button head cap screws. An 8.0"  $\times$  8.0"  $\times$  7-gauge steel top mounting plate in black powder coated paint is attached to the support column using four (4) M8  $\times$  60mm flat head cap screws. The top is secured to the mounting plate using eight (8) #12  $\times$  1.0" pan head screws. Base and vertical columns are finished in powder coat paint, titanium and black.

### **Shipping**

Unit ships knocked-down (KD) and requires field installation.

### **Compliance**


- > Meets or exceeds applicable ANSI/BIFMA test standards
- > Indoor Advantage™ Gold. Indoor air quality certified to SCS-EC10.3-2014






# **ARISE Single**

## **Teacher Station**

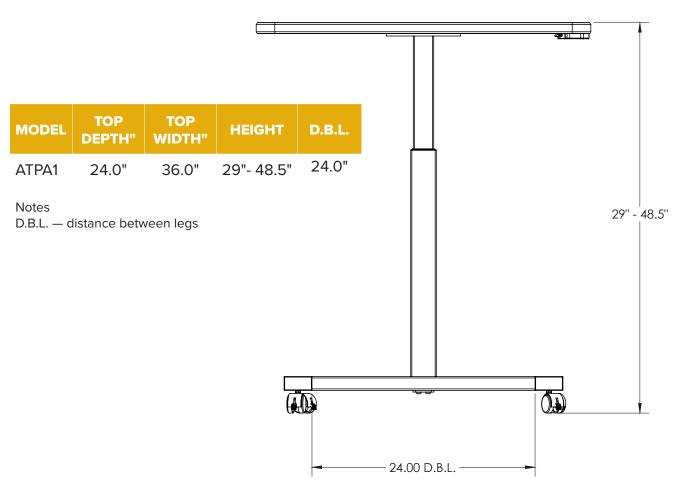

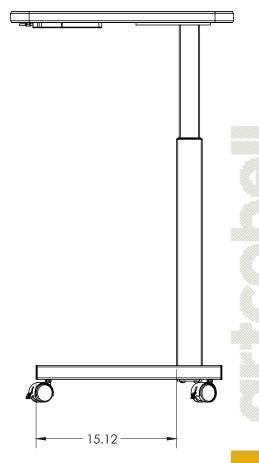



### **ARISE Double**

# **Teacher Station**

MODEL	TOP DEPTH"	TOP WIDTH"	HEIGHT	D.B.L.
ATPA2F-RC33	30.0"	48.0"	29"- 48.5"	35.5"
ATPA2F-RC34	30.0"	54.0"	29"- 48.5"	35.5"

#### Notes

D.B.L. — distance between legs

