Discover Single Pedestal Teacher Desks are available with rectangular, D-Shape or P-Shape top options and T-Leg base.

11/8" Particleboard Core with 3mm Flat Edge (F)

TOP is constructed of a 11/8" thickness 45# particleboard core with high-pressure laminate (HPL) top surface and phenolic backer sheet for balanced construction. 11/8" 3mm flat vinyl edge is secured throughout the perimeter of the top to prevent the edge from pulling away. All tops have a 2.0" corner radius.

T-Leg Base

The T-Leg includes a 380 aluminum die cast foot with internal ribbing and a designed crown and flair for shape. The base includes two (2) adjustable nylon glides with 5/16-18 stems. The column is .085" thick 6063 T-6 extruded aluminum in a 1-7/8" x 3-3/4" oval shape with internal ribs. The column is attached to the foot with four (4) $\frac{1}{4}-20 \times 2$ " flat head cap screws. The column is also attached to a 6" x 6" x 3/16" steel mounting plate with four (4) $\frac{1}{4}-20 \times 2$ " flat head cap screws. The base comes powdercoated titanium or black. Caster pack for the T-Base option includes two (2) 75mm dual-hard wheel locking casters with 7/16" friction ring for the T-Base.

Pedestals

The file case shell is fully enclosed and features a one piece side-back-side construction. The top panel and the fully enclosed base are assembled using resistance welds and MIG welds. A front and rear steel post extending the height of the cabinet, are resistance welded and MIG welded to each internal side of the case wrapper. The drawers are constructed from a one-piece Side/Bottom/Side Body. A back plate is resistance welded at both sides and across the drawer bottom. The drawer front interlocks with the drawer bottom along the entire width of the drawer. Pedestals are 23" deep overall (front of drawer to back of cabinet). All cabinets are 14 15/16"w x 28"h with glides. All drawers have inside dimensions of 12-1/4"w x 20"d. File drawers include a follower and cross rail for side to side filling. Box drawers include a drawer divider and a pencil tray is included in the top box drawer. All accessories are constructed of high impact polystyrene. All pedestals are standard locking and randomly keyed. Locks are polished chrome with interchangeable removable core. The cam lock activated horizontal and vertical lock bars engage the left hand side of the drawer. Two keys are provided per lock. Four leveling glides constructed of black nylon with 5 threads per inch are accessible from inside the cabinet, adjustable with a 3/8" 6-point socket wrench. There is 11/8" adjustment and glides are shipped installed. Post-painted metal components complete a three-stage power wash system, washing and treating each component with an iron phosphate conversion coating. An industrial grade baking enamel is then applied and baked for a durable and long lasting finish. Pedestals are attached to the TOP using four (4) 2" diameter x 7/8"h nylon mounting spacers with #12 x 2" flat head screws.

Compliance

- > Discover Teacher's Desks meet or exceed applicable ANSI/BIFMA test standards
- > Indoor Advantage™ Gold. Indoor air quality certified to SCS-EC10.3-2014




Discover Teacher Desk Rectangle Top


MODEL	TOP DEPTH"	TOP WIDTH"	TOP HEIGHT"	D.B.L. "
DTDT-RC2448F	24.0"	48.0"	30.0"	23.7"
DTDT-RC2460F	24.0"	60.0"	30.0"	35.7"
DTDT-RC2472F	24.0"	72.0"	30.0"	47.7"
DTDT-RC3048F	30.0"	48.0"	30.0"	23.7"
DTDT-RC3060F	30.0"	60.0"	30.0"	35.7"
DTDT-RC3072F	30.0"	72.0"	30.0"	47.7"


Notes

D.B.L. — distance between legs

- FIELD INSTALLED ASSEMBLY. NO STRETCHER BAR REQUIRED. STANDARD ASSEMBLY(BELOW)
 - DTDT-RC2448F (1 QTY)
 - DTLK-1TF29C (1 QTY)
 - DPF-BBFR (1 QTY)
- TWO AVAILABLE CONFIGURATIONS FOR PEDESTAL POSITION.
- PRE-DRILL HOLES AVAILABLE FOR DTLK-1TF29C [T-LEG]

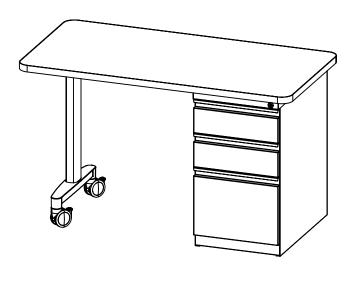



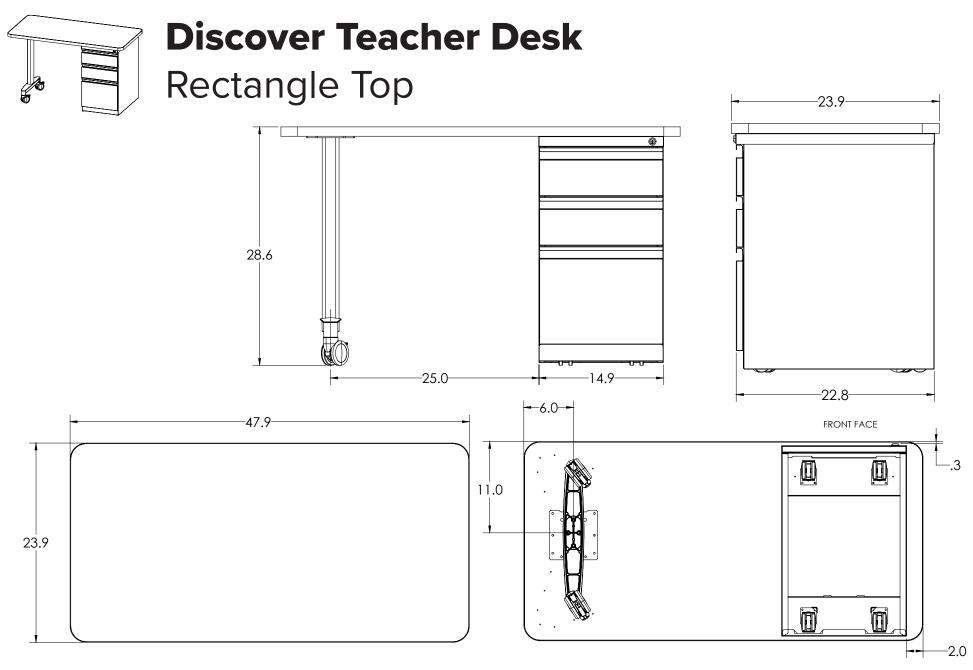


D-Shape Top


MODEL	TOP DEPTH"	TOP WIDTH"	HEIGHT"	D.B.L. "
DTDT-D3060F	30.0"	60.0"	30.0"	26.8"
DTDT-D3072F	30.0"	72.0"	30.0"	38.8"



D.B.L. — distance between legs

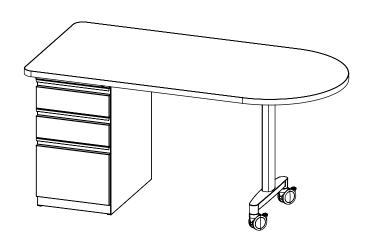


- FIELD INSTALLED ASSEMBLY. NO STRETCHER BAR REQUIRED. STAN-DARD ASSEMBLY(BELOW)
 - DTDT-D3060F (1 QTY) OR DTDT-D3072F (1 QTY)
 - DTLK-1TF29C (1 QTY)
 - DPF-BBFR (1 QTY)
- TWO AVAILABLE CONFIGURATIONS FOR PEDESTAL POSITION.
- LOCKING PEDESTAL, HIDDEN CASTERS.
- PRE-DRILL HOLES AVAILABLE FOR DTLK-1TF29C [T-LEG]

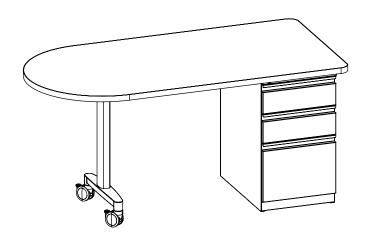



D-Shape Top

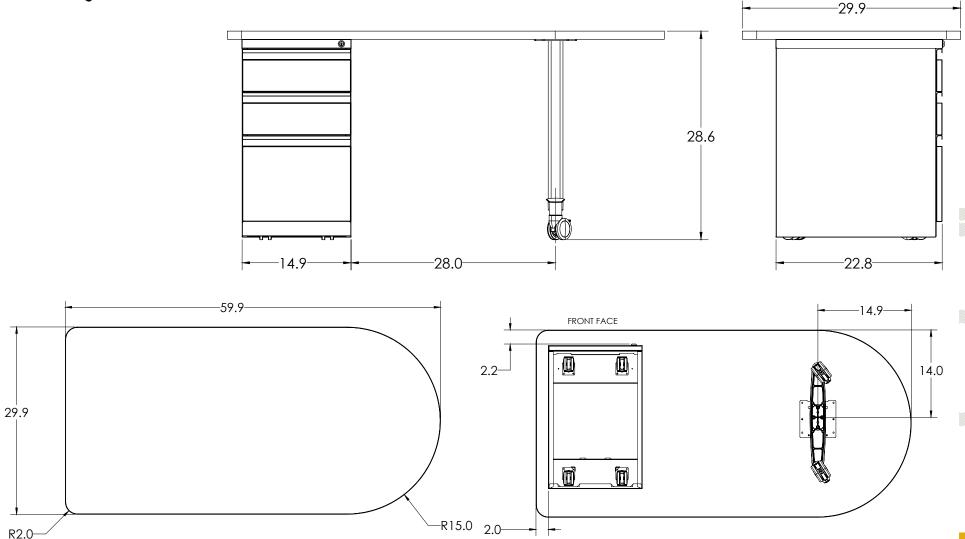


P-Shape Top


MODEL	TOP DEPTH"	TOP WIDTH"	HEIGHT"	D.B.L. "
DTDT-PR3072F	30.0"	60.0"	30.0"	35.8"
DTDT-PL3072F	30.0"	72.0"	30.0"	35.8"

Notes

D.B.L. — distance between legs

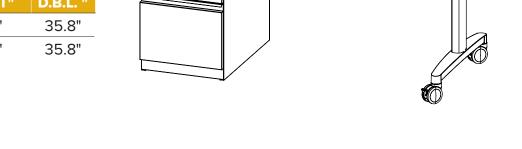

- FIELD INSTALLED ASSEMBLY. NO STRETCHER BAR REQUIRED. STANDARD ASSEMBLY(BELOW)
 - DTDT-PR3072F (1 QTY) OR DTDT-PL3072F (1 QTY)
 - DTLK-1TF29C (1 QTY)
 - DPF-BBFR (1 QTY)
- TWO AVAILABLE CONFIGURATIONS FOR PEDESTAL POSITION.
- LOCKING PEDESTAL, HIDDEN CASTERS.
- PRE-DRILL HOLES AVAILABLE FOR DTLK-1TF29C [T-LEG]

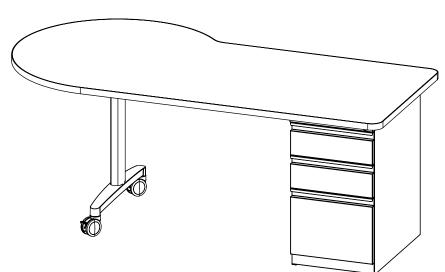



D-Shape Top

